SOLTIS
86

Serge Ferrari

MAIN FEATURES

- Perfect compromise between thermal protection and visual comfort
- Excellent outward visibility
- Weather and UV resistance
- Lightweight, durable and 100% recyclable

APPLICATIONS

- Facade blinds
- Conservatory and glassroof blinds
- Shadesails

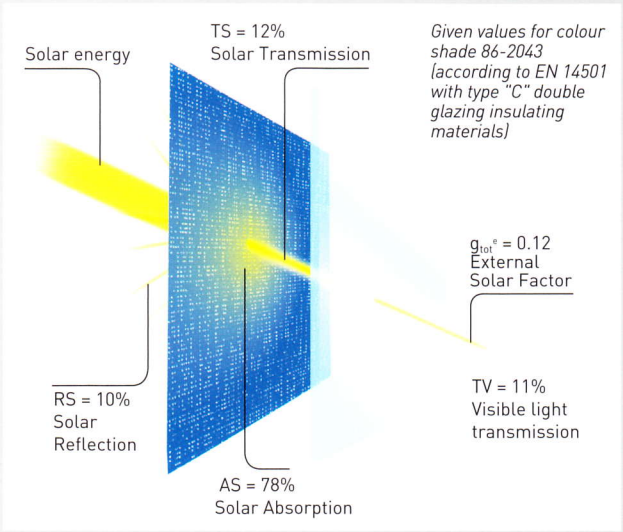

Installed externally, Soltis 86 blocks up to 88% of the solar radiation

Thermal protection and light control

Soltis 86 offers a mesh opening, ideal for combining:

- efficient solar protection,
- sufficient natural light contribution to ensure occupier well-being.

Soltis 86 therefore plays a full part in:

- building thermal control,
- creating pleasant, appropriate light environments.

Seamless large dimensions possible

Matchless transparency

Soltis 86's micro-ventilated texture ensures:

- excellent visual contact with the exterior: the view is not hidden,
- visual comfort appreciated in many architectural situations.

Colour harmony for combining blinds, textile facades and permanent awnings

Harmonised ranges

All Soltis 86 colours are coordinated with Soltis 92 to:

- coordinate all facades of a building,
- satisfy visual comfort requirements for each facade orientation,
- regulate thermal protection to provide energy savings.

GB | Soltis is a Serge Ferrari tas registered trade mark
ref 916 • NOVEMBRE 2012/V1.01 • Jean Vasseur Communication

Cover photo: private house, Knysna (South Africa)
Interior photos: Palais du Tau, Reims (FR) • Yendi Offices, Balle (CH)

SOLTIS 86

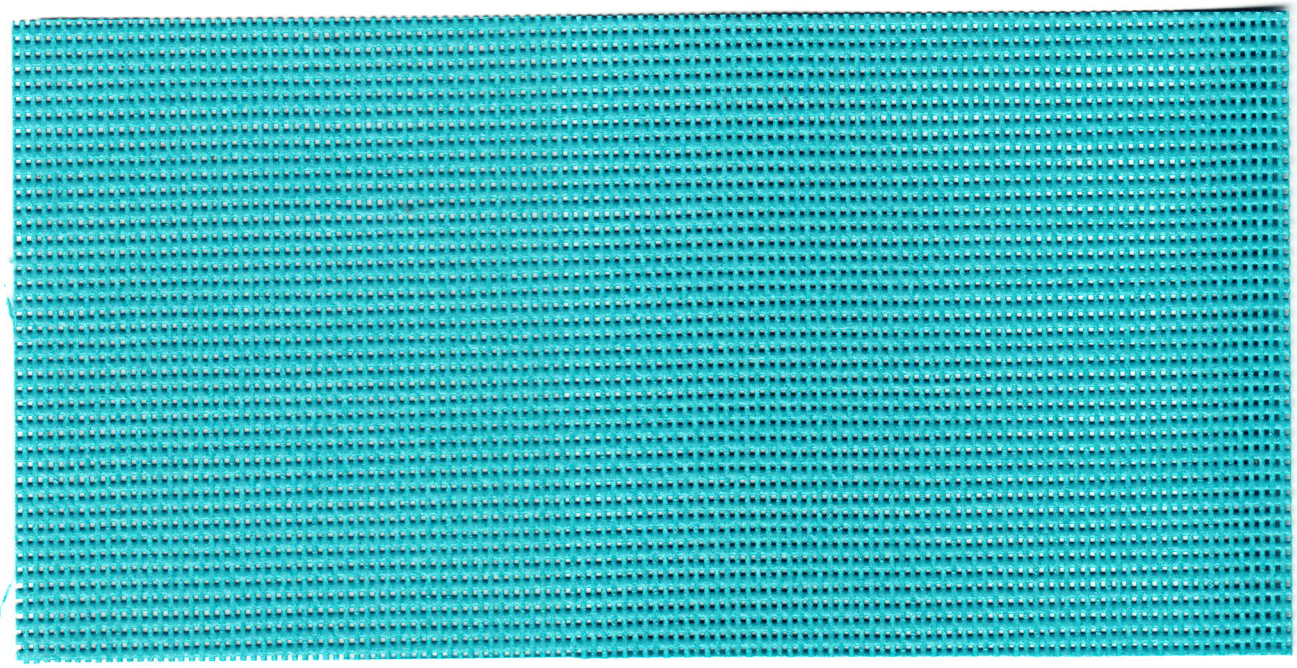

Intense turquoise 86-50271

Emerging colours

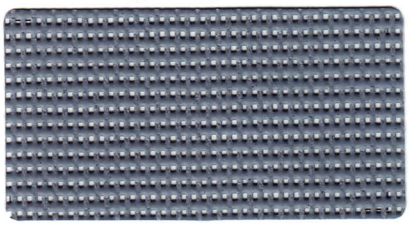

Concrete 86-2167

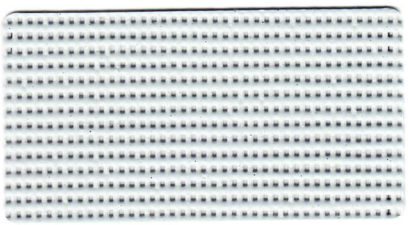

Boulder 86-2171*

White NF 86-2044*

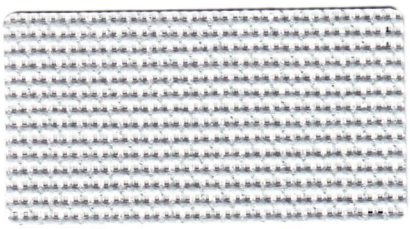

Alu/Alu NF 86-2048

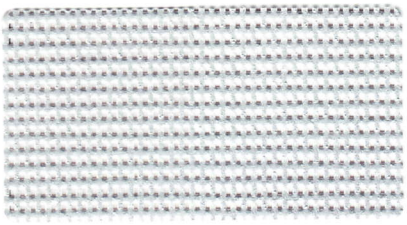

Alu/Oat NF 86-2046*

Design illusion

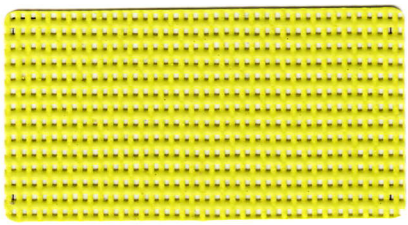

Bamboo 86-50333

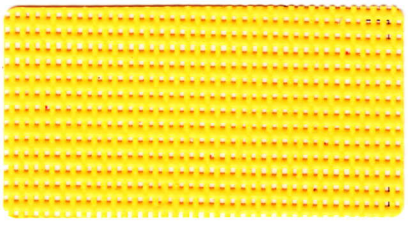

Buttercup 86-2166

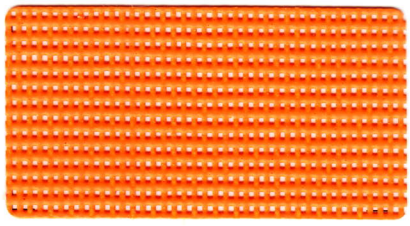

Orange 86-8204

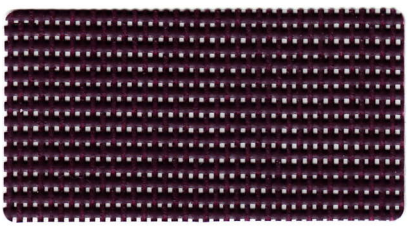

Plum 86-50336

* Also available in 267 cm width

Evolving with time

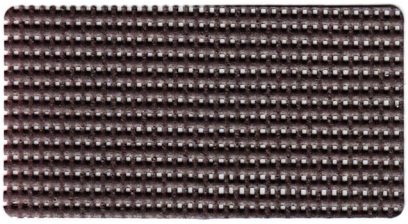

Bronze NF 86-2043*

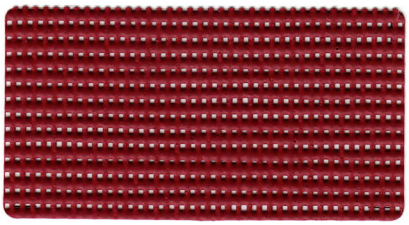

Muscat 86-50260

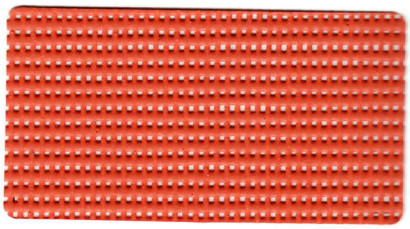

Caramel 86-50261

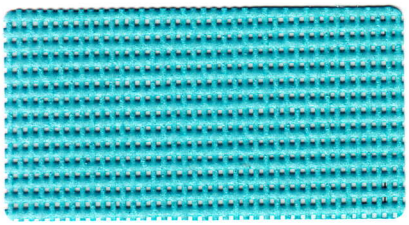

Intense turquoise 86-50271

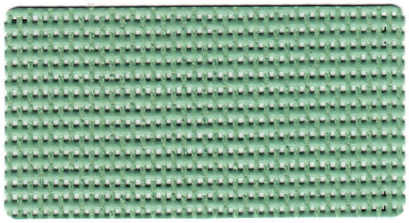

Moss green 86-2158

Body language

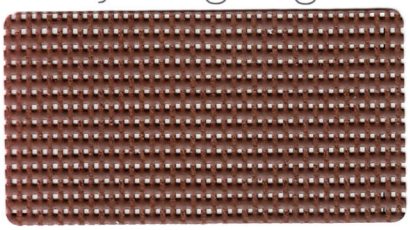

Cocoa 86-2148

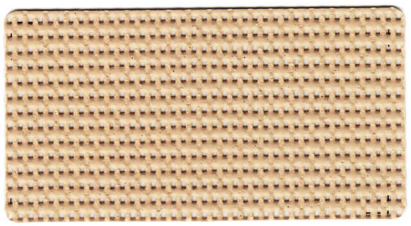

Pepper 86-2012*

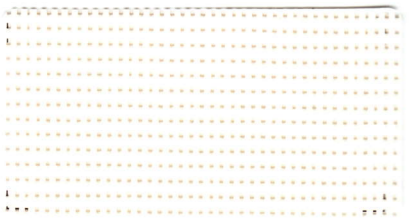

Champagne 86-2175

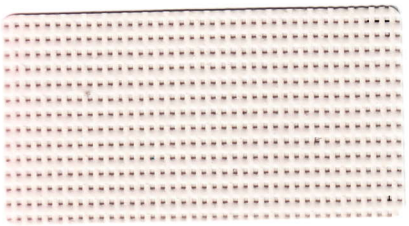

Sandy beige 86-2135*

Distinction

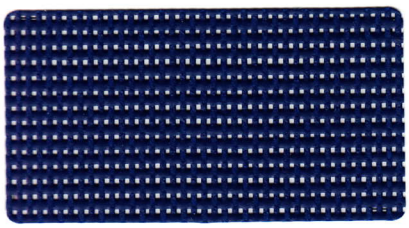

Navy 86-50342

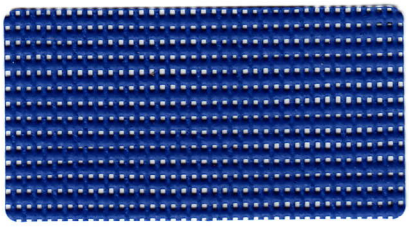

Midnight blue 86-2161

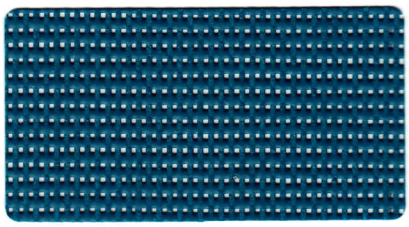

Dark teal 86-50264

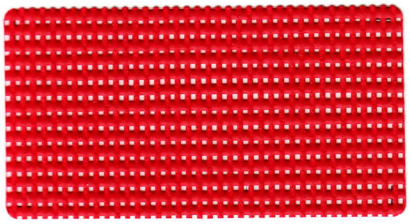

Red 86-8255

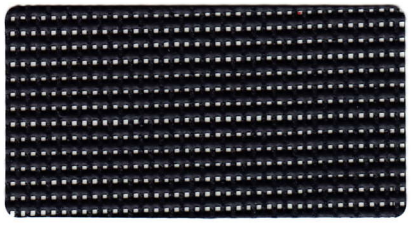

Black NF 86-2053*

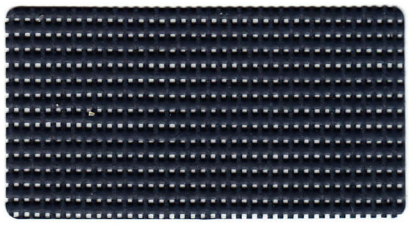

Anthracite NF 86-2047*

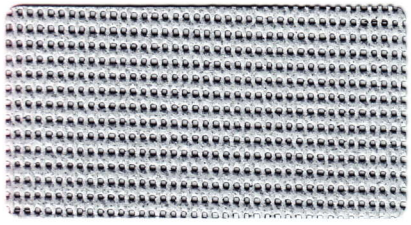

Beaten-metal NF 86-2045*

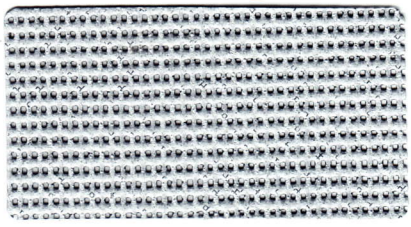

Alu/Anthracite 86-2068

Exclusive **Précontraint Serge Ferrari®** technology

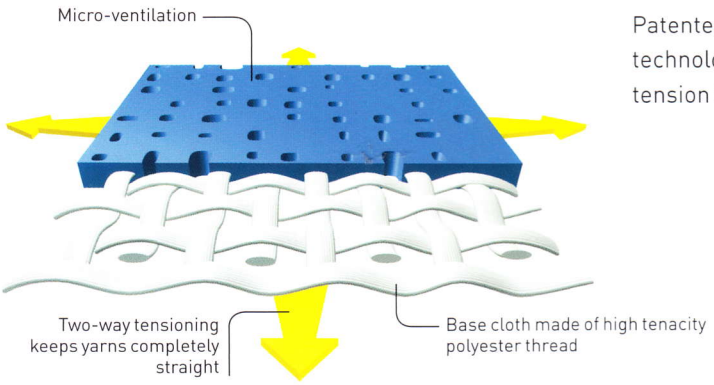

Patented worldwide, Précontraint Serge Ferrari® technology involves keeping the composite under tension throughout the manufacturing cycle.

Strength characteristics	Benefits
• Exceptional dimensional stability	• **No material deformation during installation or usage**
• Long-term strength	• **No elongation, tear resistant**
• Greater coating thickness at the top of the yarns	• **Long-term strength and aesthetic quality** • **Thinness**
• Exceptional flatness	• **Smooth finish, easy maintenance** • **Compactness, easy rolling**

NF Toiles certification

- The French "NF Toiles" label guarantees that Soltis 86 maintain a high level of quality and homogeneity.
- Certified references meet thermo-optical, strength and durability requirements stipulated for the "NF Toiles" label.
- Certification application pending for new colours (solar and light properties quoted provisionally).

Solar and light properties (EN 14501)

References		TS	RS	AS	TV n-h	TV n-n	g_{tot}^{e}	g_{tot}^{i}	NCS Codification
86-2012		18	27	55	17	16	0.15	0.48	S 4010 Y 30 R
86-2043		12	10	78	11	13	0.12	0.53	-
86-2044		32	59	9	30	14	0.21	0.38	S 0500 N
86-2045		14	29	57	14	13	0.12	0.47	-
86-2046	A	21	43	36	20	14	0.16	0.43	-
86-2046	B	19	58	23	19	14	0.14	0.38	-
86-2047		16	7	77	16	15	0.14	0.54	-
86-2048		22	42	36	22	16	0.17	0.43	-
86-2053		15	5	80	15	13	0.14	0.54	S 8500 N
86-2068	A	16	35	49	15	15	0.13	0.45	-
86-2068	B	16	7	77	15	15	0.14	0.54	-
86-2135		20	41	39	20	16	0.15	0.43	S 2005 Y 50 R
86-2148		14	13	73	14	13	0.13	0.52	S 7010 Y 30 R
86-2158		15	25	60	14	12	0.13	0.48	S 4020 G 30 Y
86-2161		16	17	67	14	14	0.14	0.51	S 5040 R 80 B
86-2166		30	45	25	26	15	0.21	0.42	S 0570 Y 10 R
86-2167		15	17	68	14	13	0.13	0.51	S 6005 R 80 B
86-2171		19	39	42	17	14	0.15	0.44	S 2502 B
86-2175		28	57	15	26	14	0.19	0.39	S 0505 Y 20 R
86-8204		27	41	32	19	14	0.19	0.44	S 0585 Y 40 R
86-8255		23	24	53	17	16	0.18	0.49	S 1580 Y 90 R
86-50260		15	13	72	14	13	0.14	0.52	S 5040 R
86-50261		21	35	44	15	14	0.16	0.45	S 3050 Y 60 R
86-50264		17	11	72	16	16	0.15	0.52	S 6030 B 30 G
86-50271		21	34	45	15	14	0.16	0.46	-
86-50333		22	32	46	19	15	0.17	0.46	S 2070 G 70 Y
86-50336		19	15	66	15	14	0.16	0.51	S 7020 R 30 B
86-50342		16	9	75	14	14	0.14	0.53	S 2020 R 80 B

A: Aluminium face exposed to the sun
B: Coloured face exposed to the sun

TS: Solar Transmission (%)
RS: Solar Reflection (%)
AS: Solar Absorption (%)
TS + RS + AS = 100% of incident energy
g_{tot}^{e}: External solar factor
g_{tot}^{i}: Internal Solar Factor
Type "C" glazing: insulating, slightly emissive double glazing in position 3 (4 + 16 + 4; argon-filled - g = 0.59 - U = 1.2).

TV n-h: Normal-hemispherical visible light transmission (%)
TV n-n: Normal-normal visible light transmission (%)

SOLTIS 86

Technical properties	Soltis 86	Standards
Weight	380 g/m²	EN ISO 2286-2
Thickness	0.43 mm	
Width	177 cm - 267 cm	
Length of rolls		
Standard format length in 177 cm	50 lm	
Standard format length in 267 cm	40 lm	
Physical properties		
Tensile strength (warp/weft)	230/160 daN/ 5 cm	EN ISO 1421
Tear strength (warp/weft)	45/20 daN	DIN 53.363
Fungistatic treatment	Degree 0, excellent	EN ISO 846-A
Flame retardancy		
Rating	**B1**/DIN 4102-1 • BS 7837 • BS 5867 • **Schwerbrennbar-Q1-Tr1**/ONORM A 3800-1 • **Classe 1**/UNI 9177-87 • **M1**/UNE 23.727-90 • **VKF 5.2**/SN 198898 • 1530.3/**AS**/NZS • **G1**/GOST 30244-94 • **Method 1**/NFPA 701 • CSFM T19 • **Class A**/ASTM E84	
Euroclass	**B-s2,d0**/EN 13501-1	
Management systems		
for Quality		ISO 9001
Certifications, labels, guarantees, recycling		

The technical data above are averaged values with a +/- 5% tolerance.
The buyer of our products is fully responsible for their application and their transformation with regard to any possible third party. The buyer of our products is responsible for their implementation and installation according to the standards, workmanship and safety regulations in force in destination countries. For information on our contractual warranty, please refer to the relevant terms and conditions.
The values quoted above represent results of tests performed in compliance with common design practices and are provided for information only to enable customers to make the best use of our products. Our products are subject to changes based on technical advances and we reserve the right to modify their characteristics at any time. The buyer of our products is responsible for checking the validity of the above data.

TOOLS AND SERVICES

- LCA and FDES (Health and Environmental Datasheet) available on request
- Personalised service for simulating your project's thermal performance and related Soltis solar protection systems: please contact your Serge Ferrari representative
- Tool for evaluating energy savings generated by Soltis solar protection systems: www.textinergie.org
- Document and photo libraries: www.sergeferrari.com

→ Contact

Proizvodnja, servis in montaža
SENČILA KLAREX
lamelne zavese
plise zavese
žaluzije
tende
roloji
screen
komarniki
panelne zavese
Stegne 21 c Ljubljana
Tel.: 01 51 14 635
Fax. 01 51 14 636
www.sencila.com

→ TEXYLOOP®

- The Serge Ferrari operational recycling chain
- Secondary raw materials of high intrinsic value compatible with multiple processes
- A quantified response to combat depletion of natural resources

www.texyloop.com

Serge Ferrari

GB | Soltis is a Serge Ferrari sas registered trade mark.
ref. 986 • NOVEMBRE 2012/V3.01 • Jean Vasseur Communication

Cover photo: private house, Knysna (South Africa)
Interior photos: Palais du Tau, Reims (FR) • Vendi Offices, Bulle (CH)